





## Pump Specifications

Engine model	CAT-C18 ACERT(630HP) TIER 4 FINAL	
Engine rpm	1900 rpm	
Maximum output	78 m <sup>3</sup> /h (H)* 125 m <sup>3</sup> /h (L)*	102 yd <sup>3</sup> /h (H)* 163 d <sup>3</sup> /h (L)*
Main cylinder	Ø180/Ø110x2100 mm	7"/4.25"x83"
Concrete cylinder	Ø200xØ2100mm	8"x83"
Cycling system	Hydraulic with manual overrides	
Stroke per minute	20 (H)*, 31 (L)*	
Concrete pressure	284 bar (H)* 177 bar (L)*	4119 psi (H)* 2567 psi (L)*
Hopper capacity	0.6m <sup>3</sup>	21ft <sup>3</sup>
S-tube	Ø200xØ150	8"x6"
Hydraulic pump	Rexroth A20VLO260	
Max. aggregate size	40 mm	1 1/2"

\*Maximum theoretical values listed  
 \*Photos and drawings are for illustrative purpose only.  
 \*Dimension will vary with different models and specifications.  
 \*Right to make technical amendments reserved.

\* (H) - High Pressure \* (L) - Low Pressure

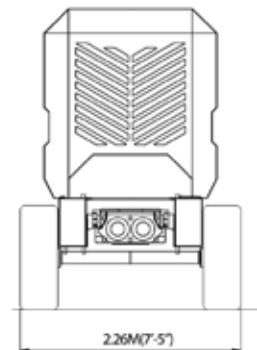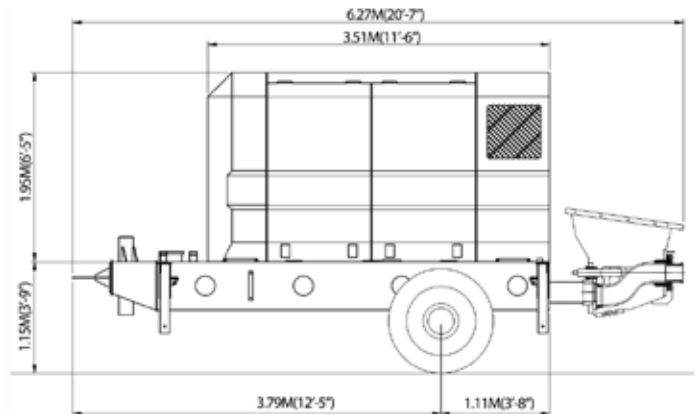

**Simply the Best.**

**KTP14000H**